



CLASSIC ECO TECHNOFIL - 3 Crack Filling Mortar

Product:


Classic EcoTechnofil – 3 is a proprietary blend of powders based on geopolymer technology with non-shrink properties used for crack filling up to 15mm wide cracks in concrete, masonry and plaster surfaces.

Benefits:

- Quick setting.
- No Priming or curing required.
- Treated surface can be painted as early as 1 hour.

Coverage:

1 Kg will cover crack length of 2 meters at 15mm depth and 15mm width.

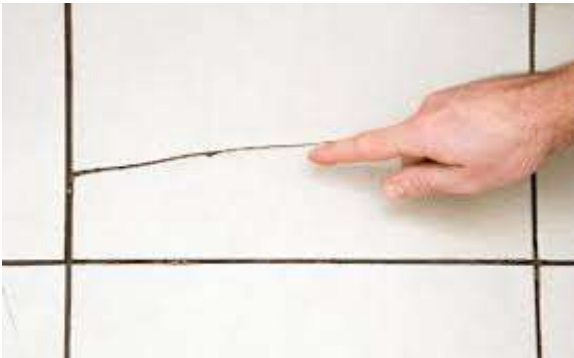

CLASSIC ECO TECHNOFIL - 3 Crack Filling Mortar

Packing:

Available in 250 gm, 1 Kg Packets & 5 Kg Buckets (Special Order).

Working Time:

Classic Eco Technofil - 3 has an approximate working time of 10 minutes at 30°C.

Site Temperature	Mixing Time
50°C – 35 °C.	3 - 5 minutes
35 °C – 35 °C.	5 – 7 minutes
25°C – 15 °C	Until the slurry becomes warm –10 minutes



Typical Properties:

Initial Setting Time -----15 minutes

Final Setting Time-----30 minutes
(Setting time will be further shortened at higher temperature site conditions)

Bond Strength to Concrete-----24 hrs:4MPa
Shrinkage-----None

TAMILNADU
Corporate Office

PRIMADONN BUILD TECH PVT LTD

No. 349, First Floor, Srinivasa Nagar, Kavaripeetai, Gummidipoondi 601 206.

Ph+91-8220513172,

Admin Office:

No.605, SelvaVinayaga Nagar, Grant Lyon Village, Ponneri Tk., Thiruvalluvar Dt., Ph+91-6379174327, +91-8438276059.

Manufacturing Unit

No.603, SelvaVinayaga Nagar, Grant Lyon, Vadagarai, Chennai 600 052. Ph.+91-9444907177

KARNATAKA

Corporate Office:

PRIMADONN CONSTRUCTION CHEMICALS (P) LTD.,

Talacauvery Layout, Basavanagar, Bangalore 560 037.
Ph.+9150878429, +91-9345411355.

PONDICHERRY

Branch Office

192/A, ChinnaSubburayaPillai Street, Near Vaikal Cutting, Puducherry 605 001. Ph.0413-4208833, 91-+9514709240

Distributor's

151, ChinnaSubburayaPillai Street, Near Vaikal Cutting, Puducherry 605 001. Ph.0413-2222100, 91-+9345561820

Email:Info@Primadonn.com,www.Primadonn.com

